

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 10 TOWNSHIP 14 RANGE 5

DATE: 4-18-08

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 12-12-02

IN. S.P.C. E ZONE NAD '83


NAME: 14051001

N: 492273.2950(m)

E: 73912.9094(m)

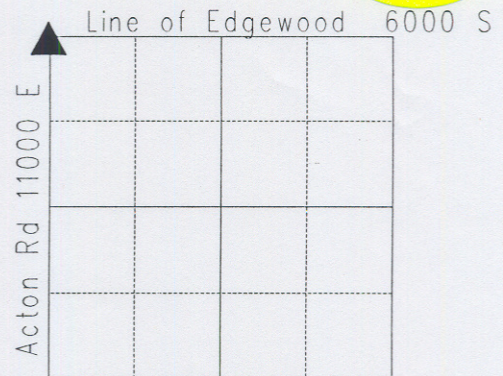

NOTE: This corner position represents a title corner and may not necessarily be in the position of the record corner.

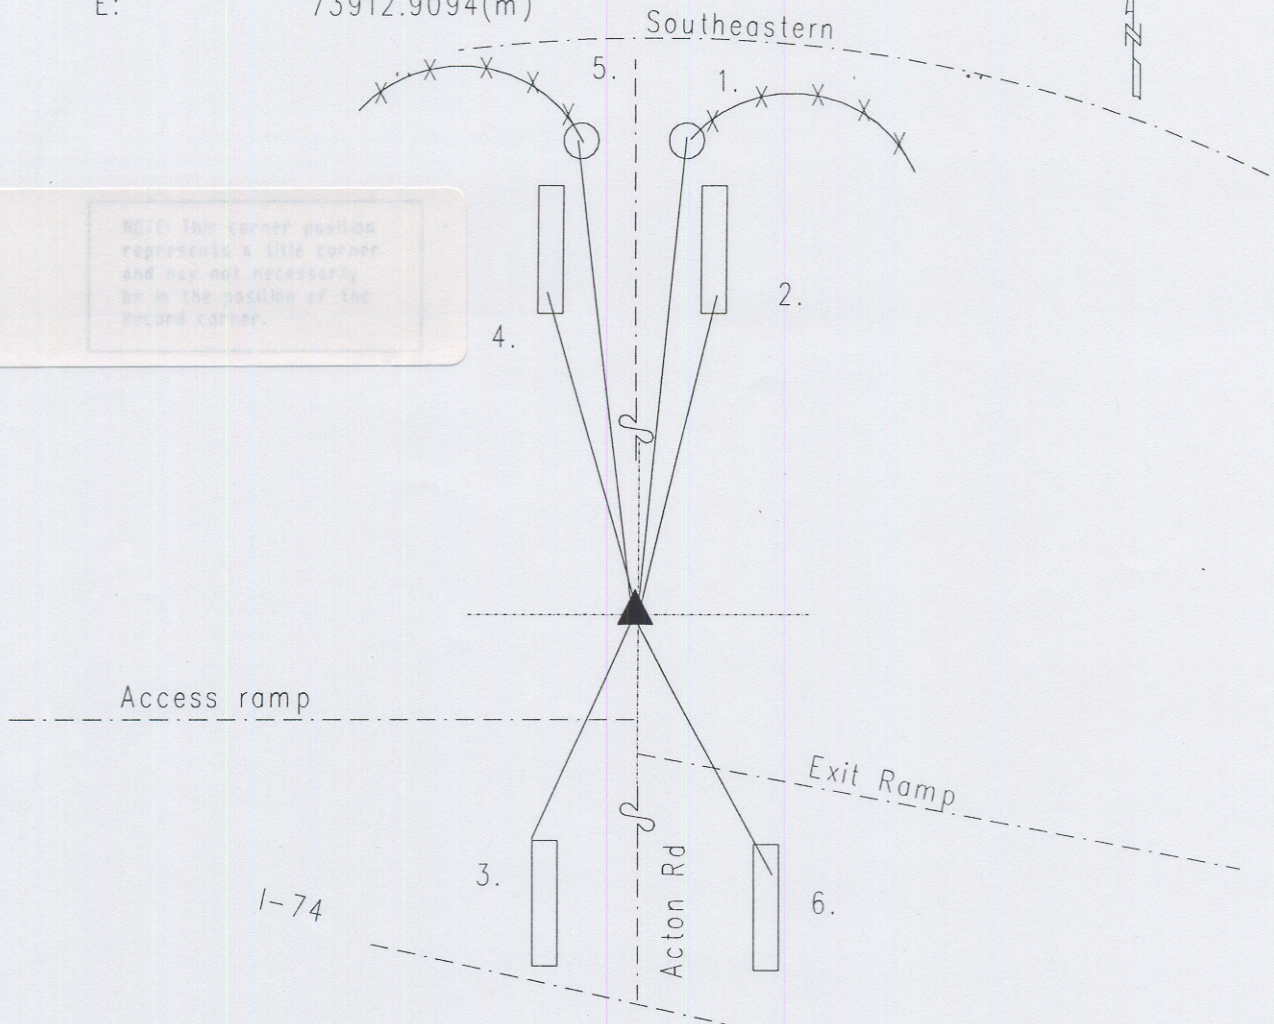

14051001

REF.	DISTANCE	DESCRIPTION
1.	133.96'	Center R/W corner fence post
2.	75.47'	Cut 'x' S-end headwall
3.	164.15'	NW corner of headwall at ground
4.	76.92'	Cut 'x' S-end headwall
5.	126.66'	Center R/W corner fence post
6.	196.75'	Cut 'x' in headwall

CORNER HISTORY: Corner originally set as a post in 1820 by John Hendricks with witness: 11" beech N 16 W 28 links; 9" ash S 19 W 15 links per Marion County Atlas pg. 13. A survey by D. B. Hosbrook dated 3-10-1852 called distance to the NE corner of 9-14-5 per Franklin Township Legal Survey Book pg. 36. Reference dated 4-3-1959 by Monroe called pipe. Reference dated 9-28-60 by Monroe called 1 1/4" brass plug. A survey by Steve Burres dated 3-9-1961 called corner as a brass monument. Reference dated 10-25-74 by Fortner called brass plug found. Reference dated 7-10-87 by Greene called brass plug found. Reference dated 1-6-94 by Whiteside called brass plug found. Reference dated 10-29-98 by Kiste called mag nail w/bw set over brass plug 2" down. Reference dated 12-12-02 by Wilcoxon called mag nail w/bw found. Reference dated 12-1-03 by Wilcoxon called found brass plug 3" down and found old hub 15" down; set Harrison where the brass plug was located.